

PRMT320



Display size  
**32" - 50"**



Max load  
**75lb (34kg)**

PARAMOUNT™

# Universal Tilting Wall Mount


FOR 32" TO 50" TVs

The Paramount™ series wall mounts combine ease of installation with viewing flexibility. With PRMT320, a low-profile design positions the TV just 67mm (2.66") from the wall. The Hook-and-Hang™ system offers easy, one-person installation of the TV. The adaptors hook onto the wall plate for a quick, simple, and secure installation. Achieve perfect positioning of the TV with the side-to-side adjustment after installation. The +15°/-5° of tool-less tilt allows quick adjustment of the viewing angle without the use of tools. Lock the tilt angle at installation to prevent tampering or moving with the IncreLok™ tilt technology.

*The PRMT320's adjustable viewing feature provides 15° of forward tilt and 5° backward tilt, creating the most optimal viewing angle.*

## Additional Features

- ✓ Universal mount fits TVs with mounting patterns up to VESA® 400x400mm
- ✓ The low-profile design positions the TV 67mm (2.66") from the wall creating an ultra-low profile finish perfect for today's ultra-slim TVs
- ✓ Side-to-side adjustment allows for perfect TV positioning
- ✓ +15°/-5° of tool-less tilt allows you to adjust for the perfect viewing angle
- ✓ Mounts to wood studs, concrete, cinder block or metal studs (metal stud accessory required)
- ✓ Installation hardware included
- ✓ Design is UL listed and tested to four times stated load capacity

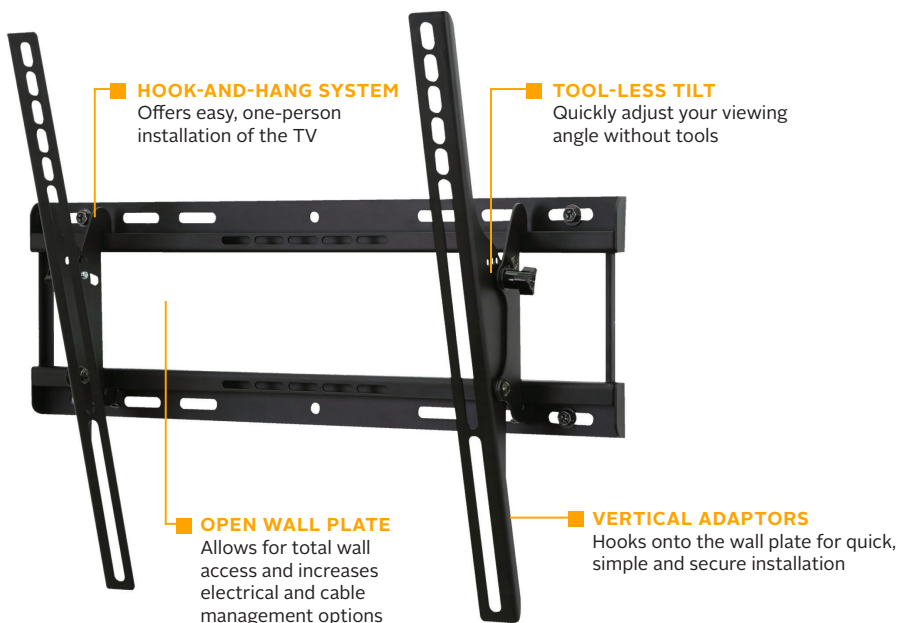

Comes in colour packaging with included installation hardware and easy to follow instructions.

|         |                                                            |
|---------|------------------------------------------------------------|
| PRMT320 | Paramount™ Universal Tilting Wall Mount for 32" to 50" TVs |
|---------|------------------------------------------------------------|






Product Specifications

|         | DIMENSIONS (W x H x D)                                  | PRODUCT WEIGHT | LOAD CAPACITY | FINISH                        | AVAILABLE COLOURS |
|---------|---------------------------------------------------------|----------------|---------------|-------------------------------|-------------------|
| PRMT320 | 20.82" x 16.88" x 2.66"-5.31"<br>(529 x 429 x 68-135mm) | 3.9lb (1.8kg)  | 75lb (34kg)   | Scratch resistant fused epoxy | Gloss black       |

Package Specifications

|         | PACKAGE SIZE (W x H x D)                     | PACKAGE SHIP WEIGHT | PACKAGE UPC CODE | PACKAGE CONTENTS                                                              | UNITS IN PACKAGE |
|---------|----------------------------------------------|---------------------|------------------|-------------------------------------------------------------------------------|------------------|
| PRMT320 | 21.54" x 8.15" x 2.95"<br>(547 x 207 x 75mm) | 5.5lb (2.5kg)       | 735029295587     | Wall mount, wall and display installation hardware, installation instructions | 1                |

All dimensions = inch (mm)

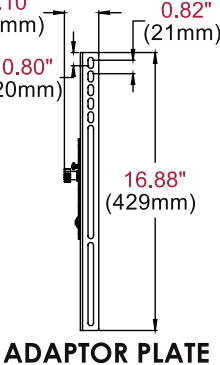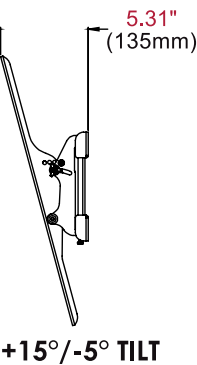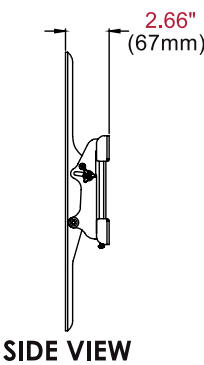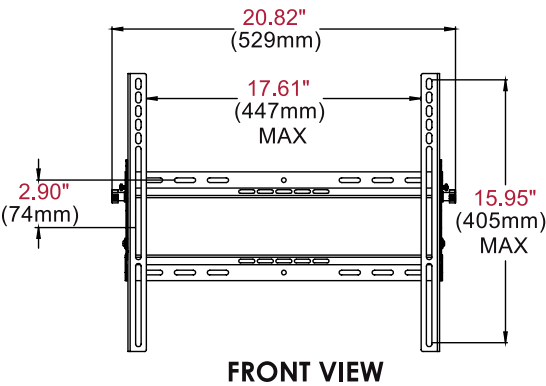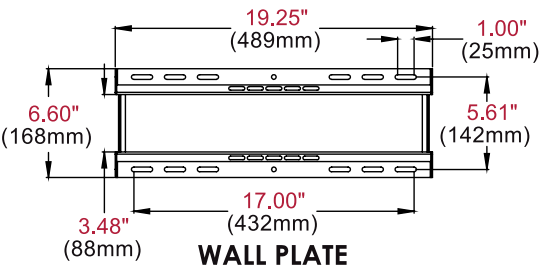

Architect Specifications

The Paramount™ Universal Tilting Wall Mount shall be a Peerless-AV model PRMT320 and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit [peerless-av.com](http://peerless-av.com) to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

**Peerless-AV**  
2300 White Oak Circle  
Aurora, IL 60502 USA  
**(800) 865-2112**  
**(630) 375-5100**  
**Fax: (800) 359-6500**

**Peerless-AV Europe**  
Unit 3 Watford Interchange  
Colonial Way, Watford  
Herts, WD24 4WP  
United Kingdom  
**+44 (0) 1923 200100**  
**Fax: +44 (0) 1923 200101**

**Peerless-AV de México**  
Ave de las Industrias 413  
Parque Industrial Escobedo  
Escobedo, N.L.,  
Mexico 66050  
**+52 (81) 8384-8300**  
**Fax: +52 (81) 8384-8360**

