

LCT420A

Monitor Desktop Arm for up to 30" Monitors



The LCT420A series is a single monitor mount with a flexible arm and includes a grommet and desk clamp mount solution. Installation is quick and easy and frees up desk space to allow positioning of the display for greater productivity. Instantly set the height of the display into a comfortable viewing position. A quick release mechanism instantly secures the monitor. Raise or lower the monitor, tilt forward and back, pan and rotate for portrait and landscape viewing.




Display size: up to 30"



Max load: 15lb (7kg)

FEATURES

- Two desk assemblies in one box, the desk clamp and grommet are supplied for either desk mounting solution
- Arm extends and adjusts for perfect positioning and ergonomic comfort to help reduce eye, back and neck strain
- Independent tension adjustment on the arm
- Tilt: +80°/-20°
Pan/Swivel: 180°
Rotate: 360°
- Portrait or landscape without removing the monitor
- Compatible with VESA® 75 and 100mm
- Can be used in laptop configuration with ACC329

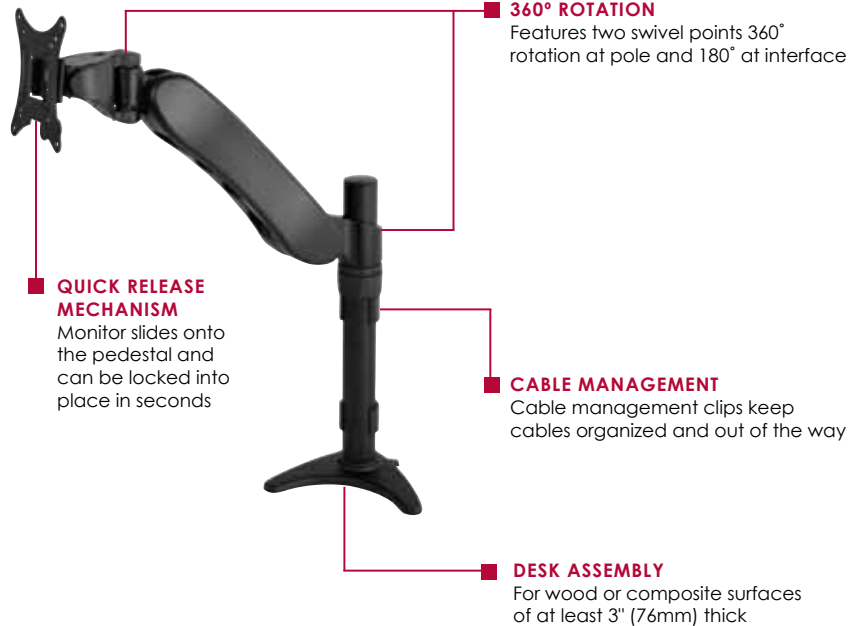

Quick release mechanism



Internal cable management



Desk clamp and grommet mount option



RoHS
APPROVED

Model Numbers

WARRANTY: Limited 5-year

LCT420A Monitor Desktop Arm for up to 30" Monitors

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
LCT420A	7.00" x 16.00" x 19.40" (178 x 406 x 493mm)	4.5lb (2.0kg)	15.0lb (7kg)	Powder coat	Black




Package Specifications

	PACKAGE SIZE (L x W x H)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
LCT420A	5.50" x 11.87" x 22.12" (140 x 301 x 562mm)	9.7lb (4.3kg)	735029279891	Post, arm, display mount, desk clamp, grommet, cable clips, mounting hardware	1

Accessories

ACC918:	Security Fasteners
ACC329:	Laptop Cooling Tray

All dimensions = inch (mm)

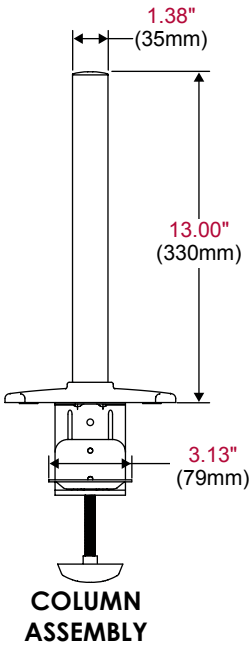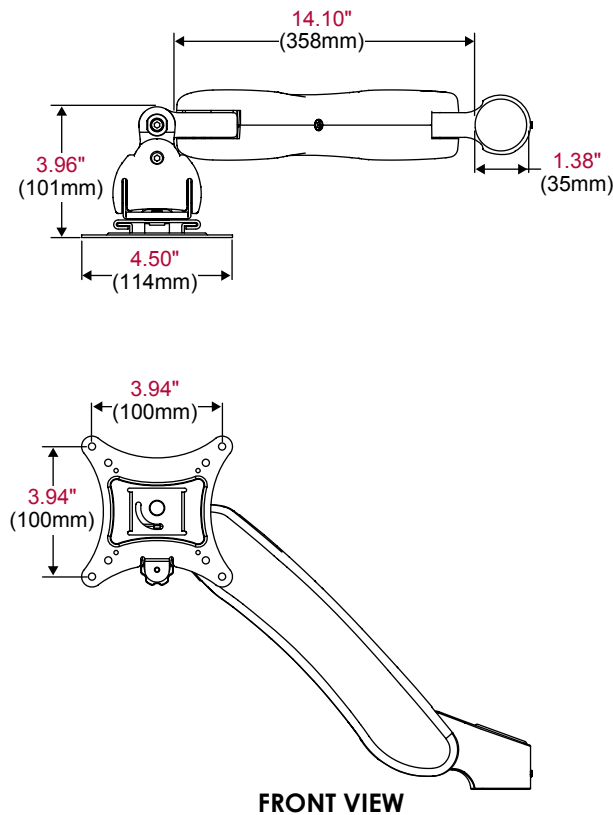

ARCHITECTS SPECIFICATIONS

The 420-Series Desktop Arm shall be a Peerless-AV model LCT420A and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.