

Xtreme™ Soundbar

The easy to install Xtreme™ waterproof sound bar is pre-wired and includes a 2-channel, 2-way, 50-watt maximum speaker system. The durable, tuned aluminum cabinet design delivers the most efficient sound output and is completely lined with rubber gaskets creating a perfectly sealed environment that resists the harshest weather conditions. Aluminum cone woofers and aluminum dome tweeters produce detailed, unclouded sound. Weatherproof and lightweight, the Xtreme sound bar easily mounts to the Ciil Xtreme line of weatherproof displays.

Features

- Gold-plated connections provide a more reliable signal connection and are not affected by external weather conditions
- Self-sensing auxiliary input allows for mobile devices such as iPods, iPhones, or tablet PCs to connect directly to the sound bar
- Tuned aluminum enclosure offers the highest level of durability and the most efficient sound output
- Aluminum cone woofers and aluminum dome tweeters produce detailed, unclouded sound quality
- Built-in Class D amplifier does not require the display's amplifier to drive power to the sound bar
- Sound bar volume is controlled by display remote control eliminating the need for multiple remote controls
- Aluminum enclosure features rubber gaskets at every seam that completely seal, isolate, and protect the sound bar's electronics from the outside environment
- Woofers and tweeters are driven by very powerful rare-earth neodymium magnets that provide the best frequency response while reducing the size and weight of the sound bar

Application




MODEL: SPK-030

Overall Dimensions	Speaker Only		In Individual Shipping Carton	
Parameter	English	Metric	English	Metric
Weight	9.4 lbs	4.3 kg	11.26 lbs	5.1 kg
Dimension with Mount Clip Attached				
Height	4.46 in	113 mm	6.5 in	165 mm
Depth	4.16 in	106 mm	6.0 in	152 mm
Width	38.27 in	972 mm	40 in	1016 mm
TV size range	42 in and up			
Signal cable length	1 ft - 6 in (457 mm)			
Signal input	Qty 1 - male stereo 3.5 mm, calibrated to Ciil Xtreme display			
Power cord length	8 ft (2438 mm)			
Power cord specs	NEMA 5 - 15 plug, UL rated			
Input power	120 VAC, 1.5 amps max			
Amp power	25 watt RMS x 2			
Aux input	Stereo 3.5 mm female for line level sources, 150 mV RMS			
Frequency response	50 Hz - 20 kHz			
Main driver	Qty 2 - 3 in aluminum cone with rubber blend surround, neodymium magnet			
Tweeter	Qty 2 - 1 in aluminum dome, neodymium magnet			
Cross over	Passive type			
Package contents	Sound bar, power cable, 3.5 mm signal cable, mounting clips, mounting screws, mounting wrenches, quick start guide			
Warranty	1 year			





Ciil Technologies, LLC
 2300 White Oak Circle
 Aurora, IL 60502
 630.898.1700

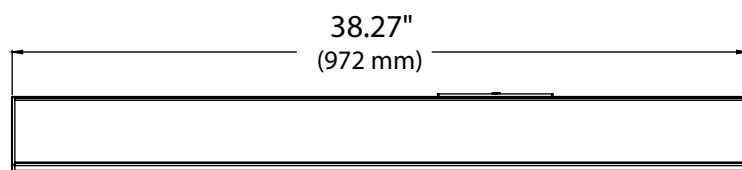


TOP VIEW

ISOMETRIC VIEW

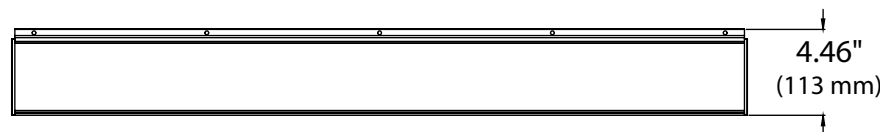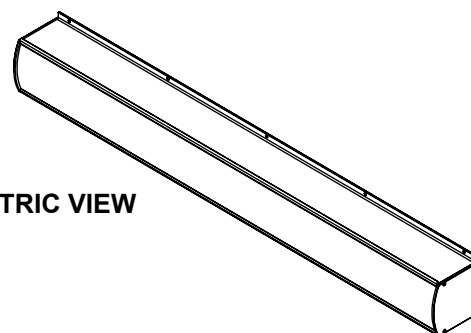

FRONT VIEW

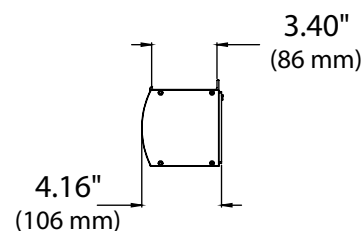

SIDE VIEW

ONLINE: www.ciiltech.com

E-Mail: info@ciiltech.com

CALL: 630.898.1700

