

47" UV2 Outdoor TV

There has never been an outdoor TV like the Peerless-AV UV2. An all-season solution for outdoor entertainment and living, the UV2 is weatherproof and maintenance free, making the outdoors a reliable location for digital entertainment. Homeowners as well as restaurant and bar owners can now have the quality outdoor TV experience they've been looking for. With the highest operating ratings in its class, the UV2 is the perfect choice for any outdoor environment.

FEATURES

- Integrated thermal management system allows an operating range of -24°F to 124°F
- Aluminum construction provides the ultimate defense against weather, discoloration, and impact
- Ambient light sensor automatically adjusts brightness to best match the lighting conditions
- Anti-reflective, impact-resistant safety glass protects the screen against damage




Back View




Top View

Product Name	
47" UV2 Outdoor Display	
Part Number	CL-4765
LCD Display	
Screen Size	47" diagonal
Aspect Ratio	16:9
Resolution	1920 x 1080
Brightness	700cd/m ²
Backlight Adjustment	Automatic (Ambient Light Sensor)
Contrast Ratio	1000:1
Viewing Angle	178° Vertical/Horizontal
Response Time	9 ms (Gray to Gray)
Refresh Rate	60 hz
TV Controller Features	
Analog TV	NTSC
Digital TV	ATSC
Picture Adjustment	Brightness/Contrast/Saturation/Tint/ Sharpness/Noise reduction
Picture Mode	Standard, Dynamic, Personal, Soft
Color Temperature Adjustment	Cool, Normal, Warm
Screen Adjustment	Normal/Wide/Zoom
Clock, Sleep Timer	Yes
MTS	Yes
V-chip	Yes
Closed Caption	Yes
Electronic Program Guide	Yes
Noise Reduction	Yes

Input/Output Connections	
TV Input	Coax, 75 ohm (x1)
VGA Input	15 pin D-SUB (x1)
HDMI Input	HDMI (x2), 480i, 480p, 720p, 1080i, 1080p
S-Video Input	Mini DIN (x1)
CVBS Input	RCA (x1)
YPbPr Input	RCA (x2), 480i, 480p, 720p, 1080i, 1080p
VGA Stereo Audio Input	3.5 mm (x1)
CVBS Stereo Audio Input	RCA (x1)
YPbPr Stereo Audio Input	RCA (x1)
Audio Output	3.5 mm (x1)
USB	Yes
RS232	DB-9 (Male)
Power	
AC Input	90 VAC to 240 VAC, 47 to 63 Hz
Power Consumption	Display – 159 W (Nominal)
Environmental	
Operating Temperature	-24°F to 124°F
Storage Temperature	-40°F to 140°F
IP Rating	IP65
Safety/EMC	FCC Class B
Mechanical	
Size	43.6 in x 25.7 in x 6.0 in (W x H x D)
Color	Black, Silver
Glass	Anti-reflective & UV Protection
VESA® Pattern	600 mm x 400 mm
Net Weight	85lb

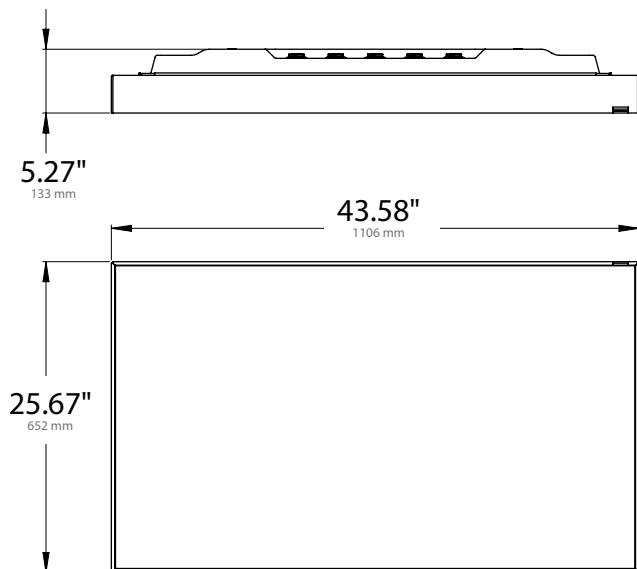

peerless-AV® CL-4765

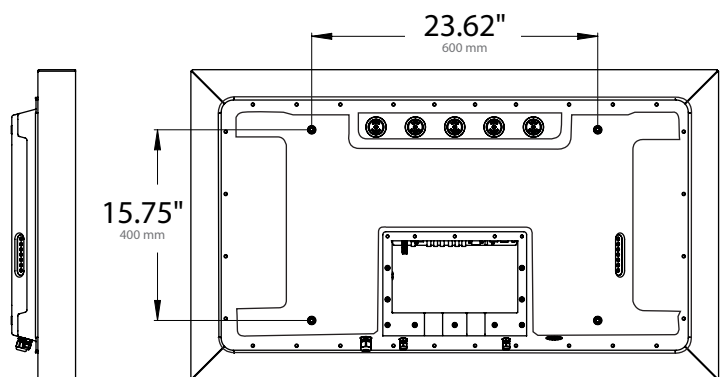

Peerless-AV
 2300 White Oak Cir
 Aurora, IL 60502
 630.375.5100

Customer Care: 877-355-2445
 peerless-av.com
 ciiltech.com
 info@peerless-av.com

ONLINE: peerless-av.com
ciiltech.com

E-MAIL: info@peerless-av.com

CALL: 630.375.5100

peerless-AV®