

DCT300



Max load
1,200lb
(544kg)

Multi-Display Ceiling Adaptor for Truss and I-Beam Structures

FOR MULTI-DISPLAY AND HIGH-LOAD INSTALLATIONS

The Peerless-AV® DCT300 heavy-duty Ceiling Adaptor is engineered for demanding multi-display installations in venues with truss or I-beam ceiling structures. With an extended combined balanced load capacity of 1,200lb, the DCT300 supports multi-display systems of up to six screens, making it ideal for large-scale digital signage, stadiums, and entertainment venues. Compatible with Peerless-AV ADD extension columns, it features an integral high-density rubber decoupler assembly that absorbs vibration before it can reach the display system. The ceiling plate attaches securely to round, square, rectangular, or I-beam trusses up to 3" wide x 3-1/2" high.

Note: Not compatible with 1-1/2"-11.5 NPT extension columns or pipes.

- Heavy-duty design supports multi-display systems of up to six displays
- Combined balanced load capacity of 1,200lb (544kg)
- Integral high-density rubber decoupler assembly prevents vibrations from being transmitted to the display system
- Compatible with Peerless-AV® ADD extension columns for multi-display applications
- Not compatible with 1-1/2"-11.5 NPT extension columns or pipes
- Attaches to round, square, rectangular, or I-beam trusses up to 3" wide x 3-1/2" high
- Uses Peerless-AV® ADD extension column fitting (stub fitting with hex head bolt and nylock nut attachment)
- Scratch-resistant black powder coated fused epoxy finish
- UL Listed for safety assurance

This product is intended for use with UL Listed products and must be installed by a qualified professional installer



Please visit peerless-av.com/en-us/patents for patent information.

Model Numbers

WARRANTY: Limited 5-year

DCT300	Multi-Display Ceiling Adaptor for Truss and I-Beam Structures with Stress Decoupler for Multi-Display and High-Load Installations
--------	---

Product Specifications


	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
DCT300	5.42" x 10.79" x 5.37" (138 x 274 x 136mm)	4lb (1.8kg)	1,200lb (544kg) <i>Combined Balanced Load</i>	Scratch-Resistant Powder Coated Fused Epoxy	Black

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
DCT300	9.63" x 6.25" x 6.13" (245 x 159 x 156mm)	4.6lb (2.1kg)	735029191957	DCT300 Mounting Adaptor, Stress Decoupler, and Installation Instructions	1

Compatible with: **ADD models:** Multi-Display Extension Columns

All dimensions = **inch** (mm)

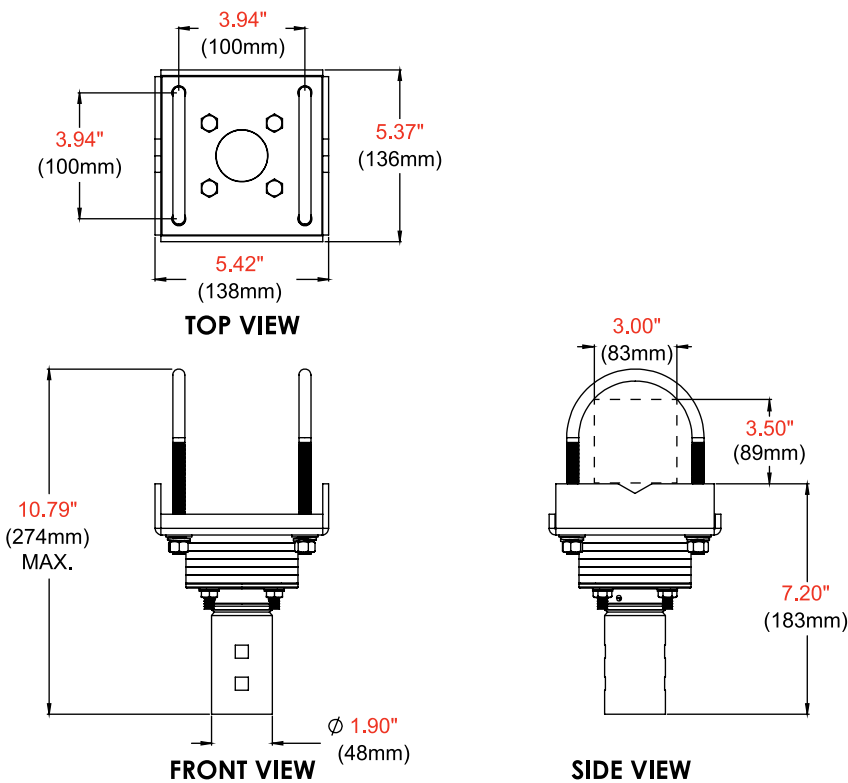

Architect Specifications

The Multi-Display Ceiling Adaptor for Truss and I-Beam Structures with Stress Decoupler shall be a Peerless-AV® model DCT300 DCT300 and shall be located where indicated on the plans. It shall consist of a heavy-duty truss ceiling plate with an integral decoupler assembly to relieve stress caused by side-to-side or swaying action that may result from minor impacts, from damaging TV/monitor systems. The truss ceiling mount shall be UL Listed. The finish shall be Black Fused Epoxy. Installation shall be made in accordance with the instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, kiosks, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502
USA
(800) 865-2112
(630) 375-5100

Peerless-AV EMEA
Unit 2 Curo Park
Frogmore, St. Albans
Hertfordshire, AL2 2DD
United Kingdom
+44 (0) 1923 200 100

Peerless-AV B.V.
Papendorpseweg 75
3528 BJ Utrecht
The Netherlands
+31 (0) 70 770 8037

Peerless-AV Latin America
Av. de las Industrias 413
Parque Industrial Escobedo
General Escobedo, N.L.,
México, 66062
+52 (81) 8384-8300

