



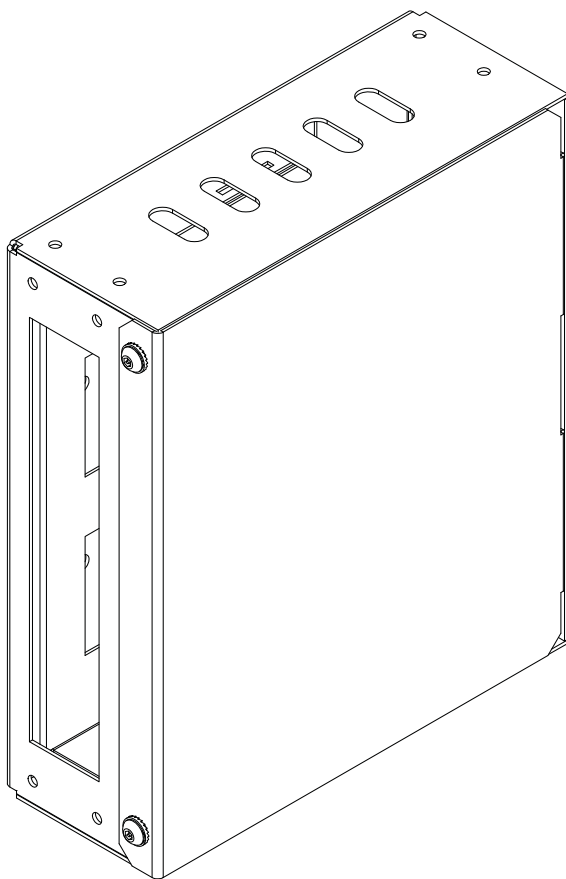

DS496

Apple® Mac® mini PC Holder Installation and Assembly



NOTE:
APPLE MAC MINI 2010 MODELS AND LATER.
APPLE MAC MINI NOT INCLUDED.

ENG




Parts List

	Part Description	Quantity	Part Number
A	computer box	1	125-1458
B	box cover	1	124-1459
C	alternate support bracket	4	124-1141
D	M4 X 10mm socket pin	4	520-1060
E	M4 X 10mm serrated washer head socket pin screw	2	510-1060
F	M5 X 10mm type-F socket pin screw	8	520-1164
G	#10 x 1/2" TEK phillips screw	4	520-1320
H	cabl e tie	6	560-9711
I	4mm security allen wrench	1	560-9646


A (1)

computer box

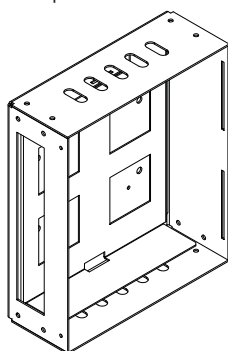


B (1)

box cover




C (4)

alternate support bracket




D (4)

M4 X 10MM
socket pin




E (2)

M4 X 10mm serrated
washer head socket
pin screw




F (8)

M5 X 10mm type-F
socket pin screw



G (4)

#10 X 1/2" TEK
phillips screw



H (6)

cabl e tie



I (1)


4mm security
allen wrench



Mounting patterns using alternate support brackets (C) and M5 X 10mm type-F socket pin screws (F).


C (4)

alternate support bracket




F (8)

M5 X 10mm type-F
socket pin screw




1

DS496

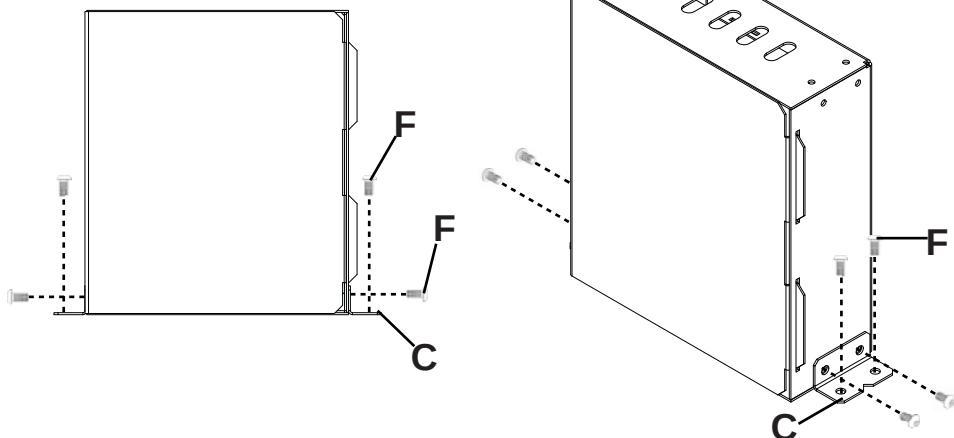

2


DS496

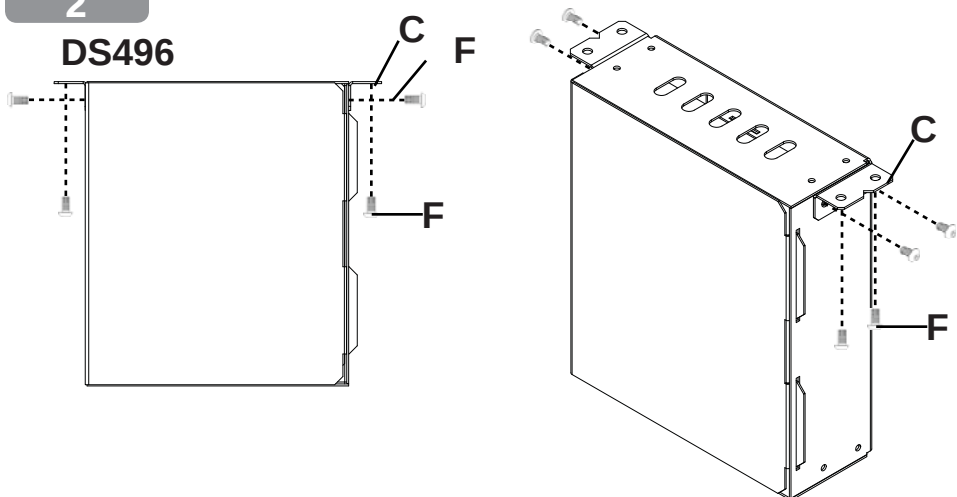

Mounting DS496 to MOD-FPSKIT100-B, MOD-FPSKIT150-B, MOD-FPSKIT100, and MOD-FPSKIT150 using four M4 X 10MM socket pins (D).


D (4)

M4 X 10MM
socket pin



1

Secure tilt box (**NOT INCLUDED**) to computer box (**A**) with four M4 X 10MM socket pins (**D**).

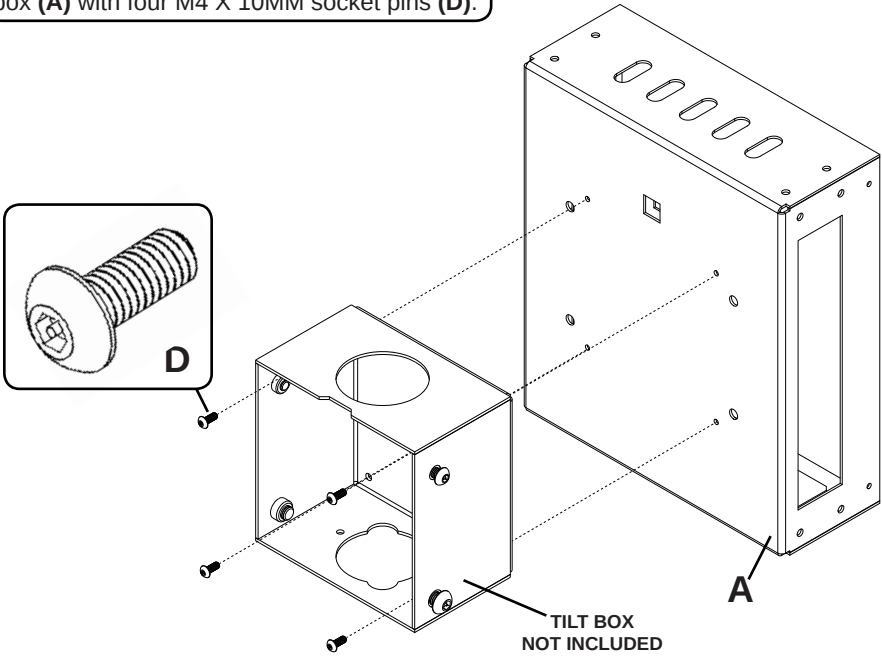


Mounting DS496 to PLCM-2.

1

Center computer box **(A)** adjustment opening with **PLCM-2 holding screw**. Secure computer box with four #10 x 1/2" TEK phillips screws **(G)**.


ADJUSTMENT
OPENING

PLCM-2 HOLDING
SCREW

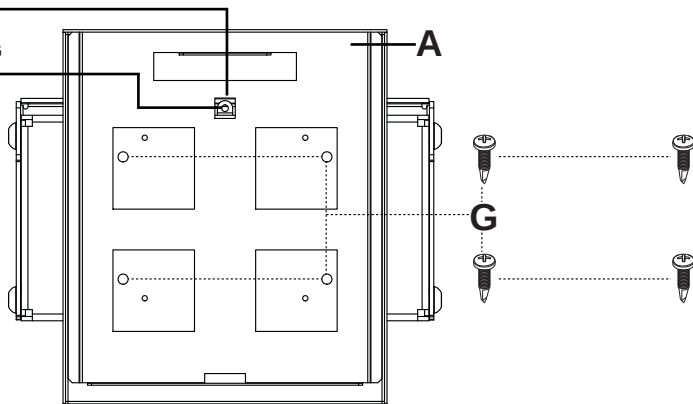


2

Assemble two cable ties **(H)**.




3

Feed cable tie assembly **(H)** through computer box **(A)**.

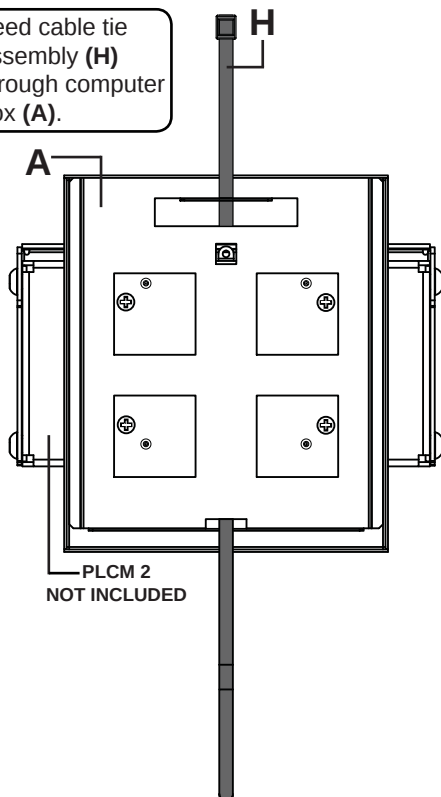


3

Place Mac mini into computer box (A).

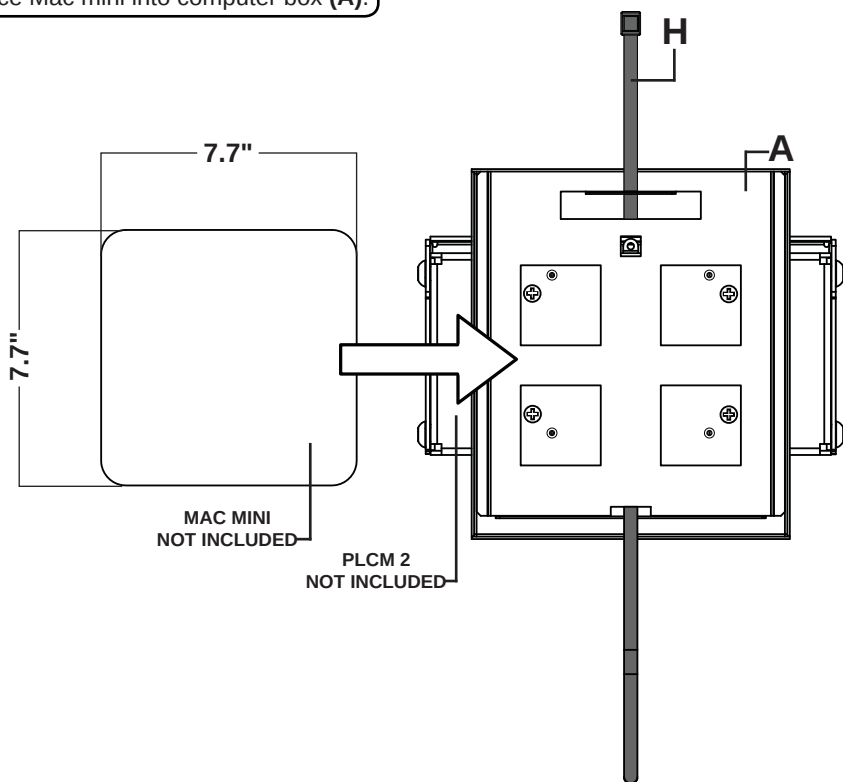


4


Secure Mac mini with cable tie assembly (H).

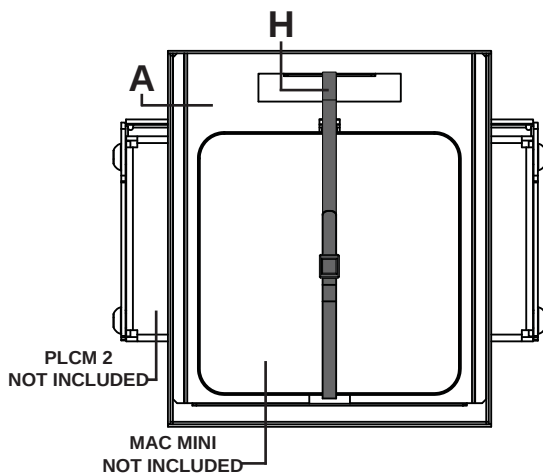

Slide box cover **(B)** over opening of computer box **(A)**.

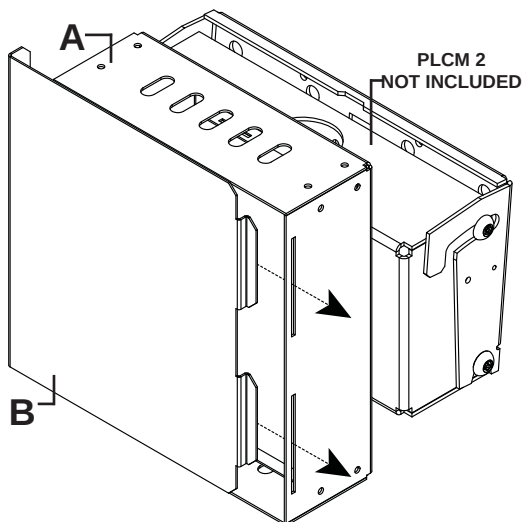

Secure box cover **(B)** with two M4 X 10mm serrated washer head socket pin screws **(E)**.

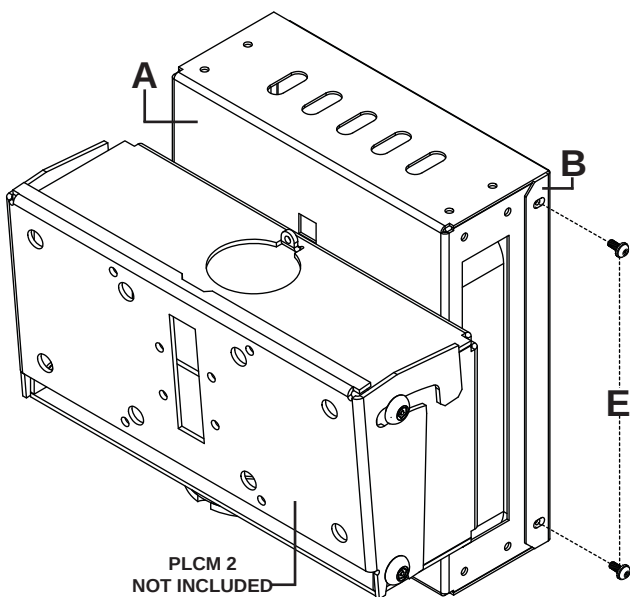

Apple and Mac are trademarks or registered trademarks of Apple Inc. in the U.S. and/or other countries. Mention of third-party products is for informational purposes only and constitutes neither an endorsement nor a recommendation. Peerless Industries, Inc. assumes no responsibility with regard to the performance or use of these products. All understandings, agreements, or warranties, if any, take place directly between the vendors and the prospective users. Every effort has been made to ensure that the information in this manual is accurate. Peerless Industries, Inc. is not responsible for printing or clerical errors.



Peerless-AV
2300 White Oak Circle
Aurora, IL 60502
Email: tech@peerlessmounts.com
Ph: (800) 865-2112
Fax: (800) 359-6500
www.peerless-av.com

© 2013, Peerless Industries, Inc.